




FLEXIBLE ENGINEERING SOLUTIONS

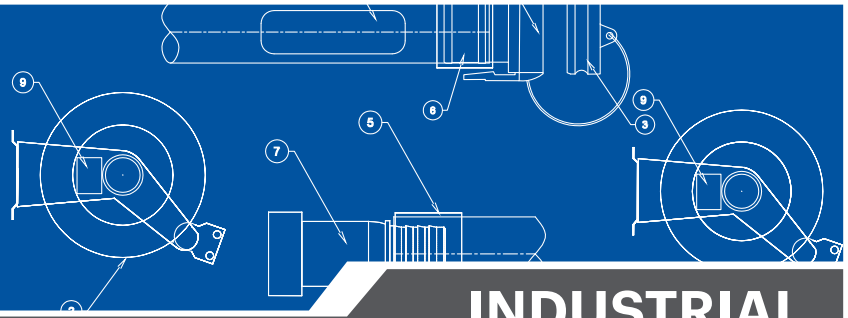

INDUSTRIAL HOSES

ABRASIVE MATERIAL DELIVERY



APPLICATION	Abrasive material delivery hard wall type
TUBE	Black NBR compound
COVER	Black, CR blended, fire-resistant and anti-static (FRAS)
REINFORCEMENT	Textile braided with anti-static helical copper wire
TEMPERATURE	-30°C to +80°C (-22°F to +176°F)

HOSE SPECIFICATIONS FOR VISCOUNT HARD WALL HOSE

Part No.	ID		OD	Working Pressure		Min. Burst Pressure		Bend Radius	Weight
	inch	mm	mm	bar	psi	bar	psi	mm	kg/m
26-MD2075	3	76.2		20	350	100	1400	155	0.55
26-MD2100	4	101.6		20	350	100	1400	250	0.95
26-MD21215	5	127.0		20	350	100	1400	405	2.20

WA

Midvale
49 Farrall Road
Midvale WA 6056
p: +61 8 6274 9333

Canning Vale
27B Baile Road
Canning Vale WA 6155
p: +61 8 9235 7500

Welshpool
Unit 11, 64 Kewdale Road
Welshpool WA 6106
p: +61 8 9251 2255

NT

Darwin
18 Callanan Road
Yarrowonga NT 0830
p: +61 8 8936 7698

QLD

Brisbane
51 Robinson Road East
Virginia QLD 4014
p: +61 7 3868 1656