




FLEXIBLE ENGINEERING SOLUTIONS

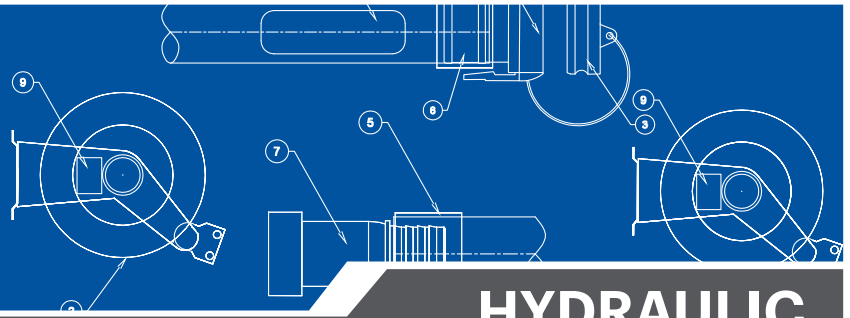

HYDRAULIC HOSES

PRESSURE WASHER

TWO WIRE BRAID PRESSURE WASHER HOSE



COVER	Grey abrasion resistant non-marking cover
REINFORCEMENT	Two wire braid of high tensile steel wire with protective coating
TEMPERATURE	-40°C to +100°C

HOSE SPECIFICATIONS FOR PRESSURE WASHER HOSE

Part No.	Hose Size	Nominal ID	Nominal OD	Working Pressure		Min. Burst Pressure	Bend Radius	Weight
	in	mm	mm	bar	psi	psi	mm	kg/m
01-VHPW-06	3/8	9.5	17.3	400	6,000	18,000	90	0.42

*Available in 10m and 20m length crimped assemblies.

WA

Midvale
49 Farrall Road
Midvale WA 6056
p: +61 8 6274 9333

Canning Vale
27B Baile Road
Canning Vale WA 6155
p: +61 8 9235 7500

Welshpool
Unit 11, 64 Kewdale Road
Welshpool WA 6106
p: +61 8 9251 2255

NT

Darwin
18 Callanan Road
Yarrowonga NT 0830
p: +61 8 8936 7698

QLD

Brisbane
51 Robinson Road East
Virginia QLD 4014
p: +61 7 3868 1656