




FLEXIBLE ENGINEERING SOLUTIONS

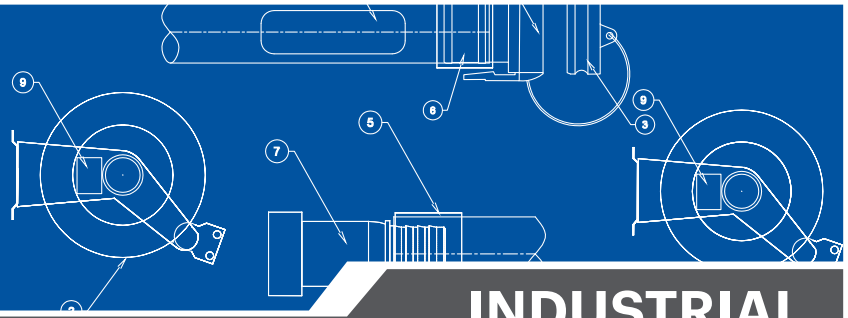

INDUSTRIAL HOSES

OIL & MUD SUCTION & DELIVERY - BS EN 1765



APPLICATION	Heavy duty hose for fuel and oil based loading and dock applications as well as offshore bunkering of fuels, oils and mud products.
TUBE	Black NBR Blend
COVER	Black CR Blend
REINFORCEMENT	High Tensile Textile Cords with Steel Wire Helix and Copper Wire (Electrically Continuous)
TEMPERATURE	-20°C to +100°C (-4°F to +212°F)
APPLICABLE STANDARDS	Meets or exceeds the requirements of BS EN 1765

HOSE SPECIFICATIONS FOR OIL & MUD SUCTION & DELIVERY BS EN 1765 HOSE

Part No.	ID		OD	Working Pressure		Min. Burst Pressure		Bend Radius	Weight
	inch	mm	mm	bar	psi	bar	psi	mm	kg/m
24-MOS2050	2	50.8	70.0	20	300	80	1200	300	2.68
24-MOS2063	2-1/2	63.5	82.0	20	300	80	1200	400	3.24
24-MOS2075	3	76.2	97.0	20	300	80	1200	500	4.11
24-MOS2100	4	101.6	128.0	20	300	80	1200	700	5.54
24-MOS2125	5	127.0	154.0	20	300	80	1200	1000	9.01
24-MOS2150	6	152.4	182.0	20	300	80	1200	1200	11.13
24-MOS2200	8	203.2	241.0	20	300	80	1200	1600	21.35

WA

Midvale
49 Farrall Road
Midvale WA 6056
p: +61 8 6274 9333

Canning Vale
27B Baile Road
Canning Vale WA 6155
p: +61 8 9235 7500

Welshpool
Unit 11, 64 Kewdale Road
Welshpool WA 6106
p: +61 8 9251 2255

NT

Darwin
18 Callanan Road
Yarrowonga NT 0830
p: +61 8 8936 7698

QLD

Brisbane
51 Robinson Road East
Virginia QLD 4014
p: +61 7 3868 1656