




FLEXIBLE ENGINEERING SOLUTIONS

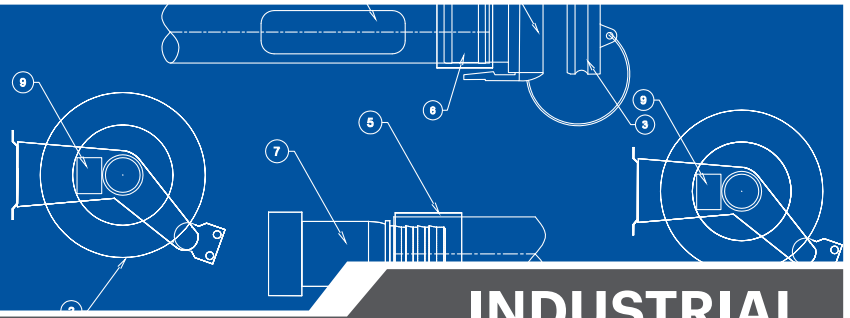

INDUSTRIAL HOSES

PETROLEUM DELIVERY



APPLICATION	Suction and discharge hose suitable for the transfer of diesel, oil and other petroleum- based products up to 50% aromatic content.
TUBE	Black NBR Blend
COVER	Black NBR Blend
REINFORCEMENT	Spiral-plied Synthetic Fabric
TEMPERATURE	-20°C to +70°C (-4°F to +158°F)

HOSE SPECIFICATIONS FOR PETROLEUM DELIVERY HOSE

Part No.	ID		OD mm	Working Pressure		Min. Burst Pressure		Bend Radius mm	Weight kg/m
	inch	mm		bar	psi	bar	psi		
24-POD1025	1	25.4	34.0	10	150	30	450	205	0.57
24-POD1032	1-1/4	31.8	42.0	10	150	30	450	255	0.79
24-POD1038	1-1/2	38.1	47.0	10	150	30	450	305	0.82
24-POD1044	1-3/4	44.4	55.0	10	150	30	450	355	1.12
24-POD1050	2	50.8	61.0	10	150	30	450	405	1.20
24-POD1075	3	76.2	88.0	10	150	30	450	610	2.10
24-POD1100	4	101.6	114.0	10	150	30	450	815	3.76

WA

Midvale
49 Farrall Road
Midvale WA 6056
p: +61 8 6274 9333

Canning Vale
27B Baile Road
Canning Vale WA 6155
p: +61 8 9235 7500

Welshpool
Unit 11, 64 Kewdale Road
Welshpool WA 6106
p: +61 8 9251 2255

NT

Darwin
18 Callanan Road
Yarrowonga NT 0830
p: +61 8 8936 7698

QLD

Brisbane
51 Robinson Road East
Virginia QLD 4014
p: +61 7 3868 1656