




FLEXIBLE ENGINEERING SOLUTIONS

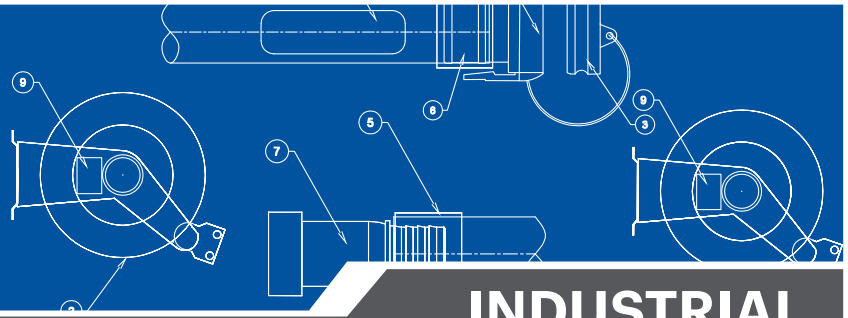

# INDUSTRIAL HOSES

## PETROLEUM SUCTION & DELIVERY



<b>APPLICATION</b>	Suction and delivery hose suitable for the transfer of diesel, oil and other petroleum-based products up to 50% aromatic content.
<b>TUBE</b>	Black NBR Blend
<b>COVER</b>	Black NBR Blend
<b>REINFORCEMENT</b>	Spiral-plied Synthetic Fabric with Steel Wire Helix
<b>TEMPERATURE</b>	-30°C to +80°C (-22°F to +176°F)
<b>APPLICABLE STANDARDS</b>	Meets or exceeds requirements of AS 2683 Type 1 Grade 2 Kind 1

### HOSE SPECIFICATIONS FOR PETROLEUM SUCTION & DELIVERY HOSE

Part No.	ID		OD mm	Working Pressure		Min. Burst Pressure		Bend Radius mm	Weight kg/m
	inch	mm		bar	psi	bar	psi		
24-POS1019	3/4	19.1	29.0	10	150	40	600	85	0.60
24-POS1025	1	25.4	35.0	10	150	40	600	115	0.85
24-POS1032	1-1/4	31.8	42.0	10	150	40	600	145	0.94
24-POS1038	1-1/2	38.1	48.0	10	150	40	600	170	1.09
24-POS1044	1-3/4	44.4	56.0	10	150	40	600	200	1.53
24-POS1050	2	50.8	63.0	10	150	40	600	230	1.90
24-POS1063	2-1/2	63.5	76.0	10	150	40	600	285	2.19
24-POS1075	3	76.2	90.0	10	150	40	600	345	3.06
24-POS1100	4	101.6	118.0	10	150	40	600	455	4.75

#### WA

**Midvale**  
49 Farrall Road  
Midvale WA 6056  
p: +61 8 6274 9333

**Canning Vale**  
27B Baile Road  
Canning Vale WA 6155  
p: +61 8 9235 7500

**Welshpool**  
Unit 11, 64 Kewdale Road  
Welshpool WA 6106  
p: +61 8 9251 2255

#### NT

**Darwin**  
18 Callanan Road  
Yarrowonga NT 0830  
p: +61 8 8936 7698

#### QLD

**Brisbane**  
51 Robinson Road East  
Virginia QLD 4014  
p: +61 7 3868 1656