




FLEXIBLE ENGINEERING SOLUTIONS

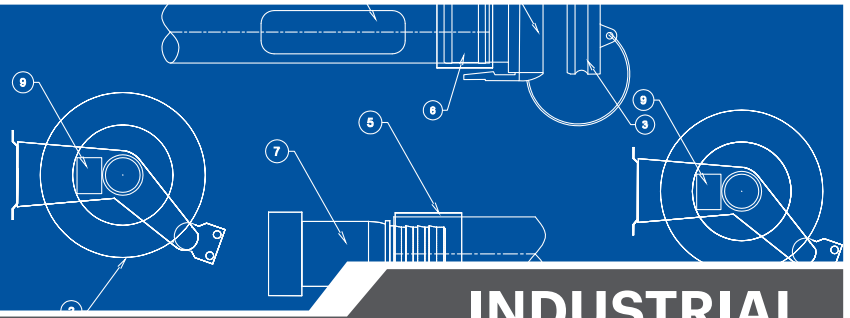

# INDUSTRIAL HOSES

## PETROLEUM SUCTION & DELIVERY



<b>APPLICATION</b>	Heavy duty rubber suction and discharge hose suitable for the transfer of diesel, oil and other petroleum based products up to 50% aromatic content. Manufactured in accordance with AS 2683 Type 1, Grade 2, Kind 1
<b>TUBE</b>	Synthetic rubber, high oil resistance
<b>COVER</b>	Synthetic Rubber: abrasion, oil, weather and ozone resistant
<b>REINFORCEMENT</b>	Synthetic fabric spiral-plied with helix wire
<b>TEMPERATURE</b>	-30°C to +80°C
<b>APPLICABLE STANDARDS</b>	Vantage Petroleum S&D Hard Wall Type/ Max W.P 10Bar/150PSI OR 20Bar/300PSI

### HOSE SPECIFICATIONS FOR PETROLEUM SUCTION & DELIVERY 20 BAR HOSE

Part No.	ID		OD	Working Pressure		Min. Burst Pressure		Bend Radius	Weight
	inch	mm	mm	bar	psi	bar	psi	mm	kg/m
24-POS2038	1-1/2	38.1	50.0	20	300	80	1200	250	1.31
24-POS2050	2	50.8	63.0	20	300	80	1200	300	1.88
24-POS2063	2-1/2	63.5	76.0	20	300	80	1200	400	2.30
24-POS2075	3	76.2	92.0	20	300	80	1200	500	3.34
24-POS2100	4	101.6	119.0	20	300	80	1200	700	4.93
24-POS2150	6	152.5	176.0	20	300	80	1200	1200	10.35

#### WA

**Midvale**  
49 Farrall Road  
Midvale WA 6056  
p: +61 8 6274 9333

**Canning Vale**  
27B Baile Road  
Canning Vale WA 6155  
p: +61 8 9235 7500

**Welshpool**  
Unit 11, 64 Kewdale Road  
Welshpool WA 6106  
p: +61 8 9251 2255

#### NT

**Darwin**  
18 Callanan Road  
Yarrowonga NT 0830  
p: +61 8 8936 7698

#### QLD

**Brisbane**  
51 Robinson Road East  
Virginia QLD 4014  
p: +61 7 3868 1656