




FLEXIBLE ENGINEERING SOLUTIONS

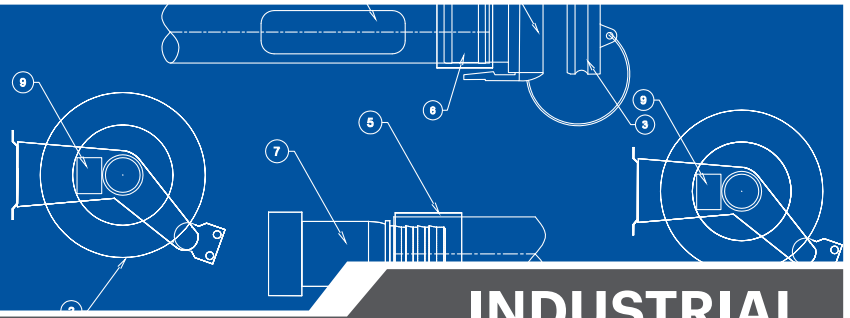

INDUSTRIAL HOSES

SPECULATOR DELIVERY & SUCTION



APPLICATION	Abrasive delivery hose designed for use in Reverse Circulation Drilling applications.
TUBE	Black NR Blend
COVER	Black NR Blend
REINFORCEMENT	Spiral-plyed Textile with Steel Wire Helix
TEMPERATURE	-20°C to +70°C (-4°F to +158°F)

HOSE SPECIFICATIONS FOR SPECULATOR SUCTION & DELIVERY HOSE

Part No.	ID		OD	Working Pressure		Min. Burst Pressure		Bend Radius	Weight
	inch	mm	mm	bar	psi	bar	psi	mm	kg/m
26-DS050	2	50.8	77.0	40	600	120	1800	255	4.50
26-DS063	2-1/2	63.5	91.0	40	600	120	1800	320	4.80
26-DS075	3	76.2	108.0	40	600	120	1800	380	5.80

WA

Midvale
49 Farrall Road
Midvale WA 6056
p: +61 8 6274 9333

Canning Vale
27B Baile Road
Canning Vale WA 6155
p: +61 8 9235 7500

Welshpool
Unit 11, 64 Kewdale Road
Welshpool WA 6106
p: +61 8 9251 2255

NT

Darwin
18 Callanan Road
Yarrowonga NT 0830
p: +61 8 8936 7698

QLD

Brisbane
51 Robinson Road East
Virginia QLD 4014
p: +61 7 3868 1656