




FLEXIBLE ENGINEERING SOLUTIONS

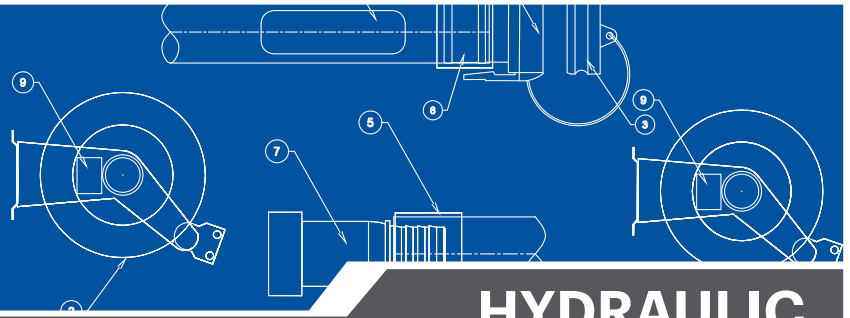

HYDRAULIC HOSES

VENOM HIGH TEMPERATURE EN 853 2SN SAE 100R2AT STEEL TWIN WIRE BRAID HYDRAULIC HOSE



TUBE	Synthetic rubber
COVER	Oil, abrasion and weather resistant
REINFORCEMENT	Two Wire Braid of High Tensile Steel Wire with Protective Coating
TEMPERATURE	-40°C to 150°C
FLAME RESISTANCE	U.S. MSHA Approved
APPLICABLE STANDARDS	Meets or exceeds requirements of EN 853 2SN & SAE 100R2AT Meets or exceeds requirements of AS 1180.13A (Anti-Static)

HOSE SPECIFICATIONS FOR VENOM HIGH TEMPERATURE TWIN BRAID HOSE

Part No.	Hose Size	Nominal ID	Nominal OD	Working Pressure		Min. Burst Pressure	Bend Radius	Weight
	in	mm	mm	bar	psi	psi	mm	kg/m
01-V2H-04	1/4	6.4	14.7	400	5800	23200	100	0.35
01-V2H-05	5/16	8	16.3	350	5075	20300	115	0.40
01-V2H-06	3/8	9.5	18.7	330	4785	19140	130	0.48
01-V2H-08	1/2	12.7	21.8	275	3988	15950	180	0.60
01-V2H-10	5/8	16	25	250	3625	14500	200	0.70
01-V2H-12	3/4	19	29	215	3118	12470	240	0.93
01-V2H-16	1	25.4	36.9	165	2393	9570	300	1.35
01-V2H-20	1 1/4	31.8	47.3	125	1813	7250	420	1.99
01-V2H-24	1 1/2	38.1	53.6	90	1305	5220	500	2.28
01-V2H-32	2	50.8	66.3	80	1160	4640	630	2.97
01-V2H-40	2 1/2	63.5	78	60	870	3480	800	3.45
01-V2H-48	3	76.2	90.5	50	725	2900	920	3.97

WA

Midvale
49 Farrall Road
Midvale WA 6056
p: +61 8 6274 9333

Canning Vale
27B Baile Road
Canning Vale WA 6155
p: +61 8 9235 7500

Welshpool
Unit 11, 64 Kewdale Road
Welshpool WA 6106
p: +61 8 9251 2255

NT

Darwin
18 Callanan Road
Yarrowonga NT 0830
p: +61 8 8936 7698

QLD

Brisbane
51 Robinson Road East
Virginia QLD 4014
p: +61 7 3868 1656