




FLEXIBLE ENGINEERING SOLUTIONS

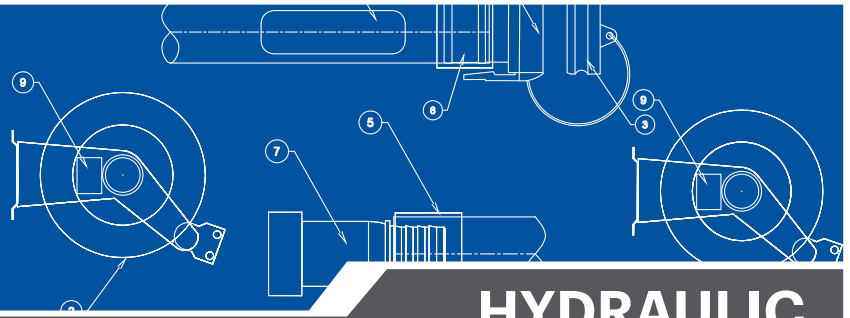

HYDRAULIC HOSES

VENOM R6

EN 853 SAE 100R6 TEXTILE BRAID HYDRAULIC HOSE



TUBE	Synthetic rubber
COVER	Oil, Weather and Abrasion Resistant Synthetic Rubber
REINFORCEMENT	One Textile Braid
TEMPERATURE	-40°C to +110°C
FLAME RESISTANCE	U.S. MSHA Approved
APPLICABLE STANDARDS	Meets or exceeds requirements of SAE 100R6 Meets or exceeds requirements of AS 1180.13A (Anti-Static)

HOSE SPECIFICATIONS FOR VENOM R6 HOSE

Part No.	Hose Size	Nominal ID	Nominal OD	Working Pressure		Min. Burst Pressure	Bend Radius	Weight
	in	mm	mm	bar	psi	psi	mm	kg/m
03-V6-04	1/4	6.3	13.5	2.8	410	1620	65	0.13
03-V6-06	3/8	10	16.7	2.8	410	1620	75	0.18
03-V6-08	1/2	12.5	20.6	2.8	410	1620	100	0.26
03-V6-10	5/8	16	23.8	2.4	350	1420	125	0.31
03-V6-12	3/4	19	27.8	2.1	310	1220	150	0.40

WA

Midvale
49 Farrall Road
Midvale WA 6056
p: +61 8 6274 9333

Canning Vale
27B Baile Road
Canning Vale WA 6155
p: +61 8 9235 7500

Welshpool
Unit 11, 64 Kewdale Road
Welshpool WA 6106
p: +61 8 9251 2255

NT

Darwin
18 Callanan Road
Yarrowonga NT 0830
p: +61 8 8936 7698

QLD

Brisbane
51 Robinson Road East
Virginia QLD 4014
p: +61 7 3868 1656