





FLEXIBLE ENGINEERING SOLUTIONS

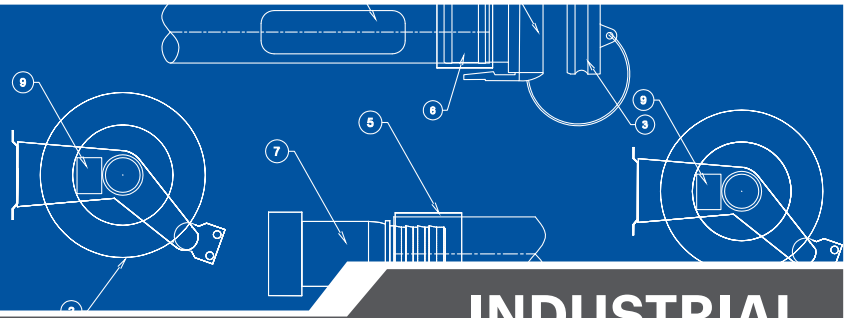

INDUSTRIAL HOSES

ORCA UTILITY

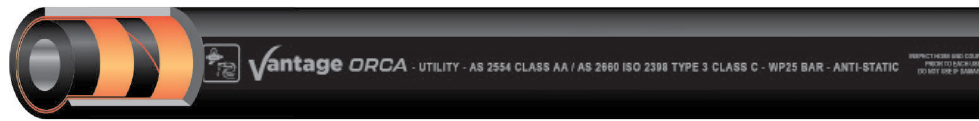

APPLICATION	A premium quality utility hose designed specifically for use in Oil, Gas and Mining industries for delivery in air, water & nitrogen applications.
TUBE	Black NBR Blend
COVER	Black NBR Blend, Anti-static
REINFORCEMENT	Textile Braid with Copper Wire (Electrically Continuous)
TEMPERATURE	-30°C to +100°C (-22°F to +212°F)
APPLICABLE STANDARDS	Meets or exceeds the requirements of AS/NZS 2554:1998 Class AA ISO 2398 Type 3 Class C.

HOSE SPECIFICATIONS FOR ORCA UTILITY HOSE

Part No.	ID		OD	Working Pressure		Min. Burst Pressure		Bend Radius	Weight
	inch	mm	mm	bar	psi	bar	psi	mm	kg/m
23-ORCA-12	1/2	12.7	23.0	25	360	100	1450	50	0.36
23-ORCA-19	3/4	19.1	30.0	25	360	100	1450	75	0.55
23-ORCA-25	1	25.4	37.0	25	360	100	1450	100	0.76
23-ORCA-50	2	50.8	65.0	25	360	100	1450	450	1.64

WA

Midvale
49 Farrall Road
Midvale WA 6056
p: +61 8 6274 9333

Canning Vale
27B Baile Road
Canning Vale WA 6155
p: +61 8 9235 7500

Welshpool
Unit 11, 64 Kewdale Road
Welshpool WA 6106
p: +61 8 9251 2255

NT

Darwin
18 Callanan Road
Yarrowonga NT 0830
p: +61 8 8936 7698

QLD

Brisbane
51 Robinson Road East
Virginia QLD 4014
p: +61 7 3868 1656