




FLEXIBLE ENGINEERING SOLUTIONS

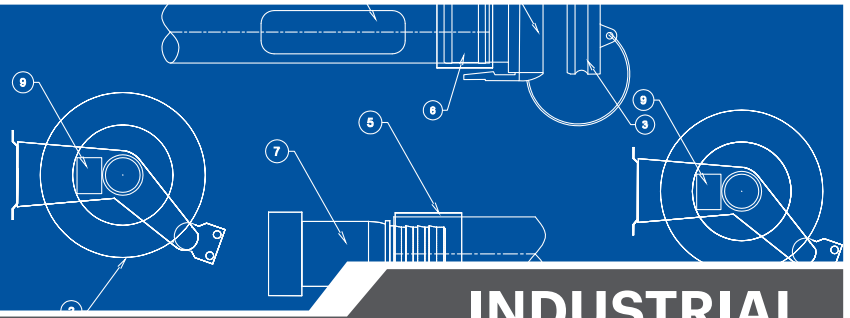

INDUSTRIAL HOSES

UTILITY



APPLICATION	Utility hose suitable for onshore and offshore plant air, water and nitrogen applications.
TUBE	Black NBR Blend
COVER	Yellow NBR / PVC Blend
REINFORCEMENT	Textile Braid with Copper Wire (Electrically Continuous)
TEMPERATURE	-20°C to +70°C (-4°F to +158°F)
APPLICABLE STANDARDS	Meets or exceeds the requirements of AS/NZS 2554:1998 Class AA / AS 2660 withdrawn.1991 Class B

HOSE SPECIFICATIONS FOR UTILITY HOSE

Part No.	ID		OD	Working Pressure		Min. Burst Pressure		Bend Radius	Weight
	inch	mm	mm	bar	psi	bar	psi	mm	kg/m
23-VUTY020	3/4	19.0	30.0	25	375	100	1500	155	0.58

WA

Midvale
49 Farrall Road
Midvale WA 6056
p: +61 8 6274 9333

Canning Vale
27B Baile Road
Canning Vale WA 6155
p: +61 8 9235 7500

Welshpool
Unit 11, 64 Kewdale Road
Welshpool WA 6106
p: +61 8 9251 2255

NT

Darwin
18 Callanan Road
Yarrowonga NT 0830
p: +61 8 8936 7698

QLD

Brisbane
51 Robinson Road East
Virginia QLD 4014
p: +61 7 3868 1656