




FLEXIBLE ENGINEERING SOLUTIONS

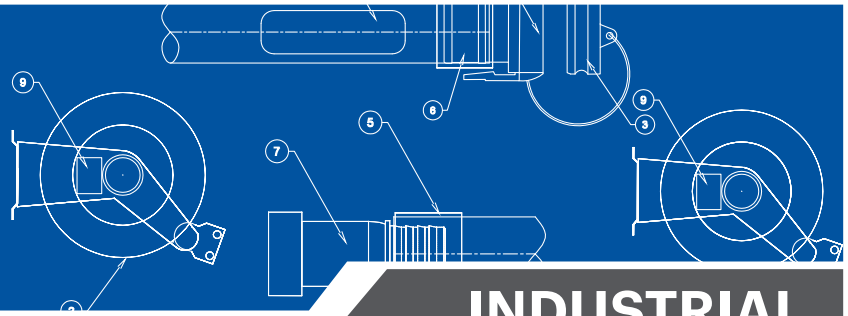

INDUSTRIAL

HOSES

WATER SUCTION CORRUGATED



APPLICATION	Suction and discharge of water in medium and heavy industrial applications with additional flexibility.
TUBE	Black NR Blend
COVER	Corrugated Black SBR Blend
REINFORCEMENT	Spiral-plyed Synthetic Fabric with Steel Wire Helix
TEMPERATURE	-30°C to +80°C (-22°F to +176°F)

HOSE SPECIFICATIONS FOR WATER SUCTION CORRUGATED HOSE

Part No.	ID		OD mm	Working Pressure		Min. Burst Pressure		Bend Radius mm	Weight kg/m
	inch	mm		bar	psi	bar	psi		
23-WSC100	4	101.6	118.0	10	150	30	450	355	5.43
23-WSC150	6	152.4	170.0	10	150	30	450	685	8.96
23-WSC200	8	203.2	225.0	10	150	30	450	1120	14.40

WA

Midvale
49 Farrall Road
Midvale WA 6056
p: +61 8 6274 9333

Canning Vale
27B Baile Road
Canning Vale WA 6155
p: +61 8 9235 7500

Welshpool
Unit 11, 64 Kewdale Road
Welshpool WA 6106
p: +61 8 9251 2255

NT

Darwin
18 Callanan Road
Yarrowonga NT 0830
p: +61 8 8936 7698

QLD

Brisbane
51 Robinson Road East
Virginia QLD 4014
p: +61 7 3868 1656