





FLEXIBLE ENGINEERING SOLUTIONS

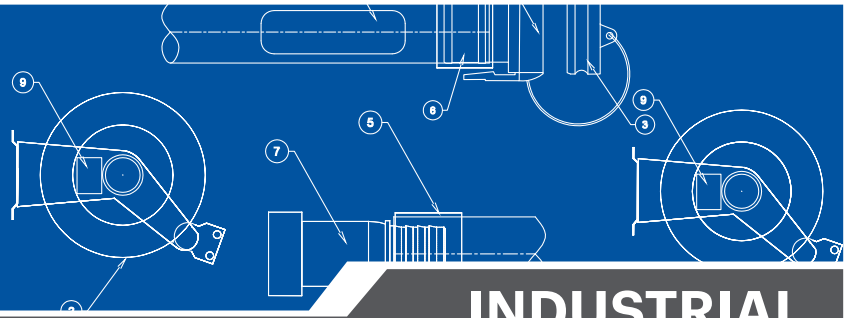

INDUSTRIAL HOSES

TWINLINE WELDING HOSE

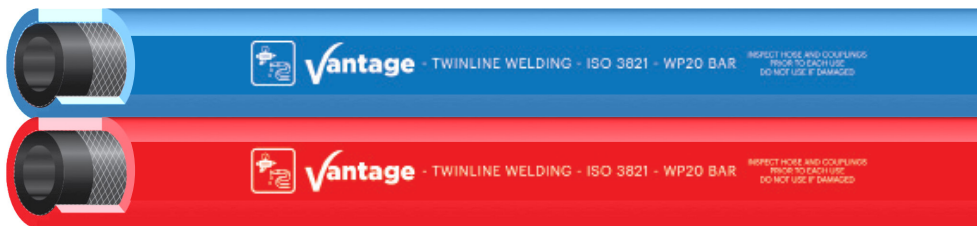

APPLICATION	Delivery of air and welding gases. Hose finished as two separate lines bonded together.
TUBE	Black SBR Blend
COVER	Red SBR Blend / Blue SBR Blend
REINFORCEMENT	Textile Braid
TEMPERATURE	-35°C to +85°C (-31°F to +185°F)
APPLICABLE STANDARDS	Meets or exceeds the requirements of ISO 3821

HOSE SPECIFICATIONS FOR TWINLINE WELDING HOSE

Part No.	ID		OD	Working Pressure		Min. Burst Pressure		Bend Radius	Weight
	inch	mm	mm	bar	psi	bar	psi	mm	kg/m
23-TW05	3/16	4.8	12.0	20	300	60	900	40	0.28
23-TW06	1/4	6.4	13.0	20	300	60	900	50	0.31

WA

Midvale
49 Farrall Road
Midvale WA 6056
p: +61 8 6274 9333

Canning Vale
27B Baile Road
Canning Vale WA 6155
p: +61 8 9235 7500

Welshpool
Unit 11, 64 Kewdale Road
Welshpool WA 6106
p: +61 8 9251 2255

NT

Darwin
18 Callanan Road
Yarrowonga NT 0830
p: +61 8 8936 7698

QLD

Brisbane
51 Robinson Road East
Virginia QLD 4014
p: +61 7 3868 1656