




FLEXIBLE ENGINEERING SOLUTIONS

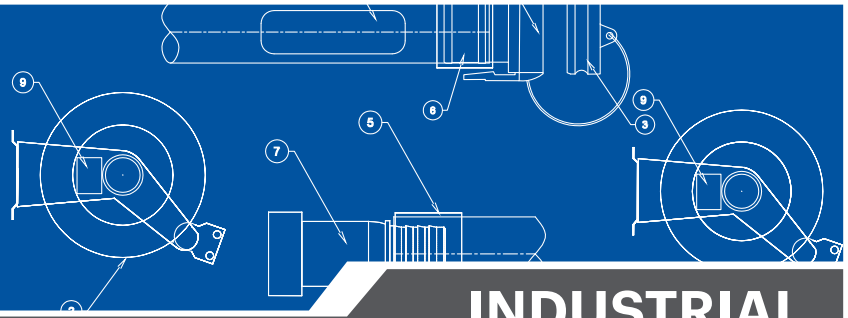

# INDUSTRIAL HOSES

## OIL & MUD DELIVERY



<b>APPLICATION</b>	Heavy duty hose for fuel and oil based loading and dock applications as well as offshore bunkering of fuels, oils and mud products.
<b>TUBE</b>	Black NBR Blend
<b>COVER</b>	Black CR Blend
<b>REINFORCEMENT</b>	High Tensile Textile Cords with Copper Wire (Electrically Continuous)
<b>TEMPERATURE</b>	-20°C to +100°C (-4°F to +212°F)

### HOSE SPECIFICATIONS FOR OIL & MUD SOFT WALL HOSE

Part No.	ID		OD mm	Working Pressure		Min. Burst Pressure		Bend Radius mm	Weight kg/m
	inch	mm		bar	psi	bar	psi		
24-MOD2075	3	76.2	96.0	20	300	80	1200	456	3.60
24-MOD2100	4	101.6	124.0	20	300	80	1200	612	5.10
24-MOD2125	5	127.0	154.0	20	300	80	1200	635	6.8
24-MOD2150	6	152.4	178.0	20	300	80	1200	912	8.5

#### WA

**Midvale**  
49 Farrall Road  
Midvale WA 6056  
p: +61 8 6274 9333

**Canning Vale**  
27B Baile Road  
Canning Vale WA 6155  
p: +61 8 9235 7500

**Welshpool**  
Unit 11, 64 Kewdale Road  
Welshpool WA 6106  
p: +61 8 9251 2255

#### NT

**Darwin**  
18 Callanan Road  
Yarrowonga NT 0830  
p: +61 8 8936 7698

#### QLD

**Brisbane**  
51 Robinson Road East  
Virginia QLD 4014  
p: +61 7 3868 1656